



Keeps your
feet warm!

SR.HYDROPEX™ - THE SMART
SOLUTION FOR CONCRETE
SLAB HEATING AND
INSULATING.



Be clever and
insulate with
Bluefox™

Developed by
contractors for
contractors



RADIANT HEAT FLOORING
EXPANDED POLYSTYRENE
RIGID INSULATION [EPS]



SR.HYDROPEX™



CUSTOMER SERVICE
AND TECHNICAL SUPPORT

1 888 332-3456
info@styorail.ca
styorail.ca



65 RTE 105
La Pêche | QC
J0X 3G0 | CANADA



STYORAIL

EXPAND
YOUR WORLD
STYORAIL.CA

Install your radiant flooring in no time.

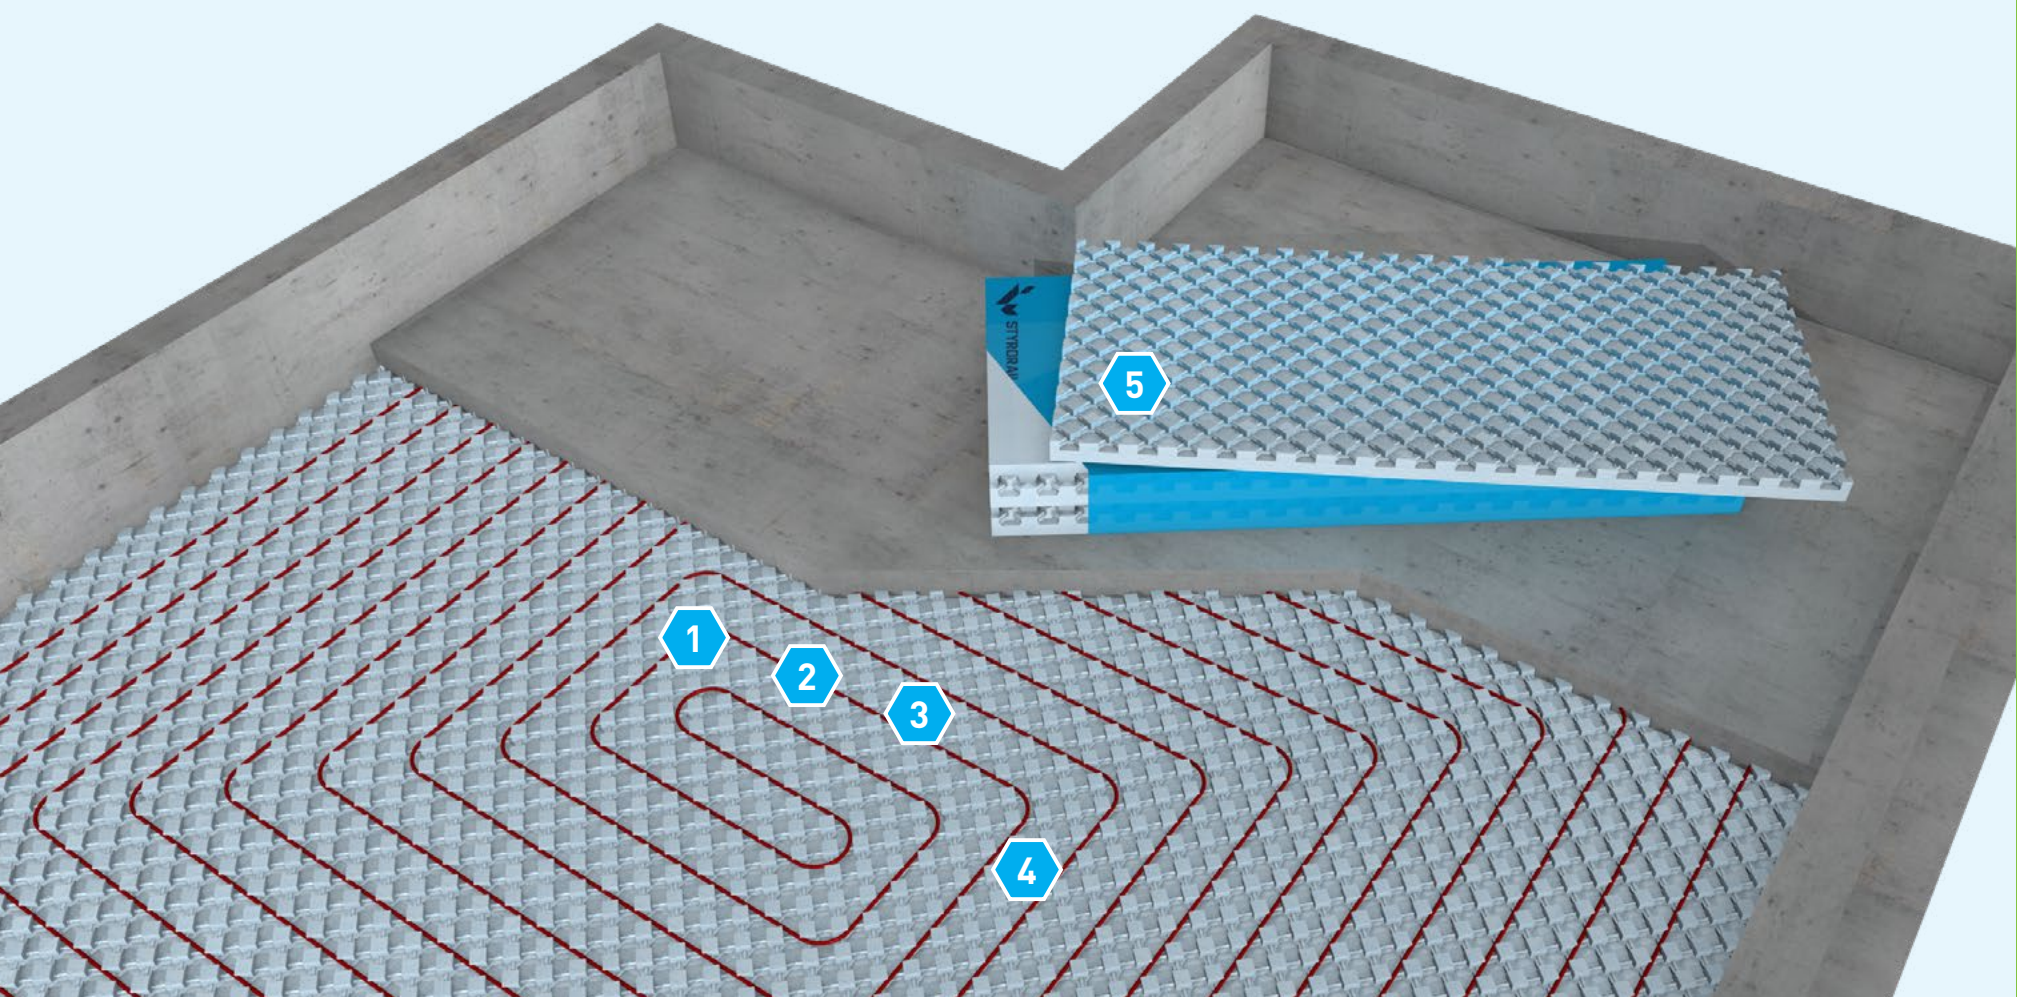

**COMPATIBLE
WITH ALL PIPE
DIMENSIONS**

Can be used with
any pipe dimension:
½", ⅝", ¾", 1"



**STANDING
INSTALLATION
APPLICATION**

No need for fasteners.
Locks into place.
Does not lift during the
pouring of the concrete.




**MULTIDIRECTIONAL
SYSTEM WITHOUT
TIES OR MESH**

Spacing at 3", 6", 9",
and 12", without the
use of wire mesh to
hold the pipes in place.



**COMPATIBLE
WITH REBAR CHAIRS**

Also available in
extra: 2" metal
supports for
reinforcement bars.




**OPTIMIZED DESIGN
FOR TRANSPORT**

"Sandwich style"
shipped panels.
Protects the
honeycomb surface.

SR.HYDROPEX™

16 PSI

AIM FOR A FASTER INSTALLATION WITH THE LARGEST
PANEL ON THE MARKET.




DOMES

Secures all types
of pipes in place.




BUMPS

Raises the pipe for
a perfect contact with
the concrete. Even
distribution of heat.




SHIP LAP JOINTS

On four sides for
a perfect overlap
between panels.

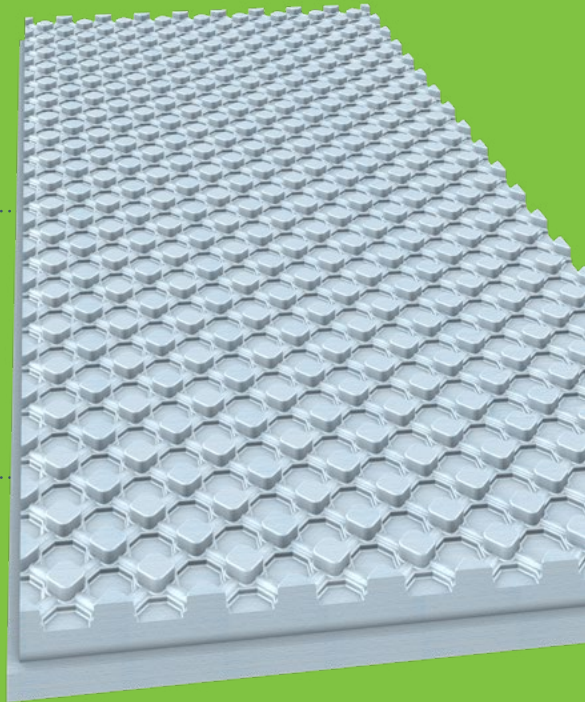

PHYSICAL PROPERTIES

SR.HYDROPEX™	R-VALUE	COMPRESSIVE RESISTANCE
200	R10.0	16 PSI
400	R10.8	40 PSI

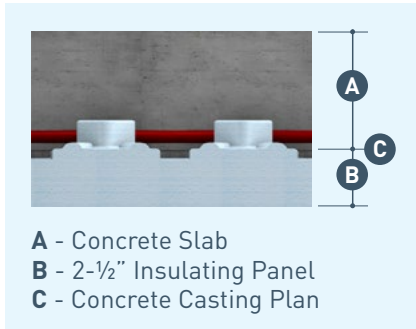

AVAILABLE FORMATS

The **SR.HYDROPEX™** is manufactured in panels
of 48"x 96" with a depth of 2 ½".

CERTIFICATIONS

CAN/ULC-S701-11
CCMC 13271-L [200]
CCMC 13277-L [400]

